

KOLEJ UNIVERSITI TUNKU ABDUL RAHMAN
FACULTY OF ENGINEERING AND TECHNOLOGY
ACADEMIC YEAR 2018/2019
JANUARY/FEBRUARY EXAMINATION

BTEC2213 INSTRUMENTATION AND MEASUREMENT

MONDAY, 11 FEBRUARY 2019

TIME: 9.00 AM – 11.30 AM
(2 HOURS 30 MINUTES)

BACHELOR OF ENGINEERING (HONOURS) ELECTRICAL AND ELECTRONICS

Instructions to Candidates:

Answer **ALL** questions.
All questions carry equal marks.

Attachment included:

APPENDIX I : Chi-Square Distribution Table
APPENDIX II : Standard Normal Distribution Table
APPENDIX III : Thermocouple Table

BTEC2213 INSTRUMENTATION AND MEASUREMENT**Question 1**

A silicon-integrated circuit chip contains 150 ostensibly identical transistors. Measurements are made of the current gain of each transistor. Measurements have a mean of 20.05 and a variance of 0.46. Measurements are divided into six class intervals as shown in Table Q1 below.

Table Q1

Current Gain	18.5 – 18.9	19.0 – 19.4	19.5 – 19.9	20.0 – 20.4	20.5 – 20.9	21.0 – 21.4
Frequency	7	18	26	35	22	12

- a) Apply the chi-squared test to determine whether the measurements fit a Gaussian distribution at the level significance of 5%. (17 marks)
- b) Given that there is 10% of transistors rejected due to out of acceptable range, determine the corresponding acceptable range for the current gain of the transistors. (8 marks)

[Total: 25 marks]

(Remarks: Chi-Square Distribution Table and Standard Normal Distribution Table are provided in Appendix I and Appendix II respectively)

BTEC2213 INSTRUMENTATION AND MEASUREMENT**Question 2**

- a) Suggest TWO techniques to improve the signal shown in Figure Q2(a) before sending it to the next stage of processing. Justify your answers. (10 marks)

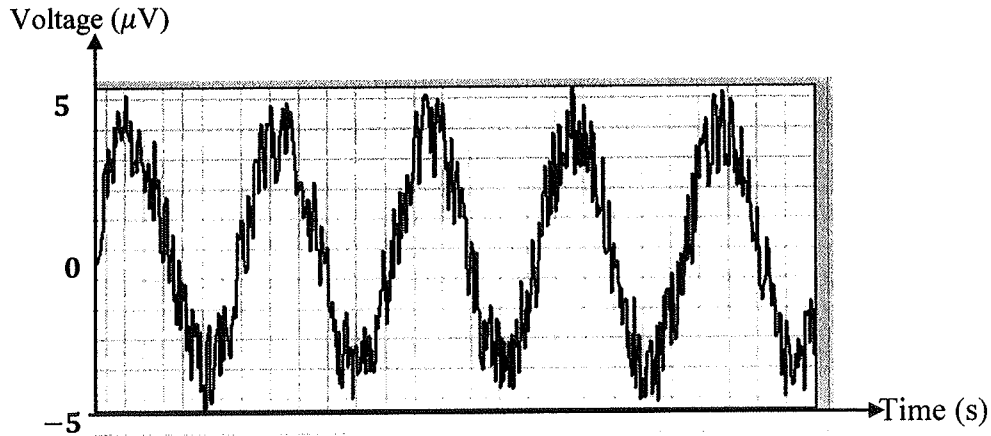


Figure Q2(a)

- a) In Data Acquisition system (DAQ), an Analog-to-Digital Converter (ADC) is necessary to convert the measured analogue voltage or current level into digital signals for the computer to store and analyse. In contrast, a Digital-to-Analog Converter (DAC) converts digital signals to analogue signals to allow the computer to control the instrumentation process. Figure Q2(b) shows the basic 2 bit R-2R ladder DAC converter using OP-AMP.

Derive the analogue output voltage, V_o in terms of V_R for binary input of $B_1B_0 = 10$. (15 marks)

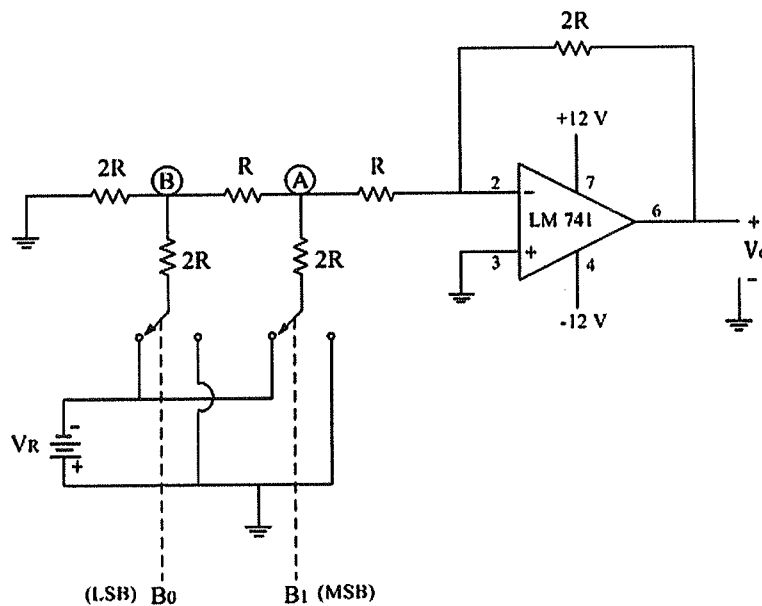


Figure Q2(b)

[Total: 25 marks]

Question 3

The unknown resistance R_u of a thermistor is to be measured by a bridge circuit of the form shown in Figure Q3, where the bridge components and the excitation voltage are of the following values:

$$R_1 = R_2 = R_3 = 1000 \Omega \text{ and } V_i = 10 \text{ V}$$

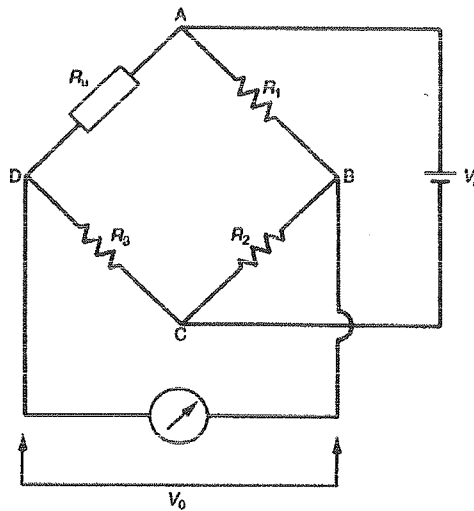


Figure Q3

The resistance (R_u) of the thermistor is related to the measured temperature (T) in degrees Kelvin ($^{\circ}\text{K}$) according to the following expression:

$$R_u = 1000 \exp \left[3675 \left(\frac{1}{T} - 0.003354 \right) \right]$$

- Calculate R_u values for the measured temperature in steps of 10°C between 0°C and 50°C , in terms of nearest ohm. (6 marks)
- With the results in Q3a, calculate bridge output voltage, V_o for the measured temperature in steps of 10°C , between 0°C and 50°C , in 2 decimal places. Hence, redraw table Q3 and fill up the tables.

Table Q3

Temperature, T ($^{\circ}\text{C}$)	0	10	20	30	40	50
Bridge output voltage, V_o (V)						

(8 marks)

- Hence, with the data obtained in Table Q3 from Q3b and using least-square regression, calculate the coefficients a and b for the relationship of $V_o = a + bT$ that best describes the measurement system. (11 marks)

[Total: 25 marks]


BTEC2213 INSTRUMENTATION AND MEASUREMENT**Question 4**

- a) In connecting extension leads to a nichrome-nickel thermocouple to measure the temperature of a fluid, a technician had inadvertently interchanged the extension leads from the thermocouple. The ends of the extension wires were held at a reference room temperature of 0 °C and the output electromotive force (e.m.f.) measured was 25.6 mV. The junction between the thermocouple and extension leads was at 80 °C.
- Produce a diagram to show the connection of the thermocouple and extension leads. Label the temperature, thermocouple type and e.m.f. at the correct junctions. (4 marks)
 - Deduce the fluid temperature from the measured e.m.f. if the technician thought he had connected extension leads to thermocouple correctly. (2 marks)
 - Calculate the true fluid temperature. (4 marks)

(Remarks: Thermocouple Table is provided in the Appendix III)

- b) A customer wants to measure the temperature of a metal plate, and he cannot make decision which type of transducer to buy, either a thermocouple or IR sensor. The metal plate has an emissivity of 0.7. Quick temperature response and long life are required. Recommend a suitable sensor to your customer for measuring the temperature of the metal plate with justification. (15 marks)

[Total: 25 marks]

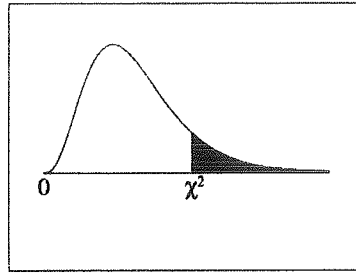BTEC2213 INSTRUMENTATION AND MEASUREMENT**Appendix I: Chi-Square Distribution Table**

The shaded area is equal to α for $\chi^2 = \chi^2_{\alpha}$.

<i>df</i>	$\chi^2_{.995}$	$\chi^2_{.990}$	$\chi^2_{.975}$	$\chi^2_{.950}$	$\chi^2_{.900}$	$\chi^2_{.100}$	$\chi^2_{.050}$	$\chi^2_{.025}$	$\chi^2_{.010}$	$\chi^2_{.005}$
1	0.000	0.000	0.001	0.004	0.016	2.706	3.841	5.024	6.635	7.879
2	0.010	0.020	0.051	0.103	0.211	4.605	5.991	7.378	9.210	10.597
3	0.072	0.115	0.216	0.352	0.584	6.251	7.815	9.348	11.345	12.838
4	0.207	0.297	0.484	0.711	1.064	7.779	9.488	11.143	13.277	14.860
5	0.412	0.554	0.831	1.145	1.610	9.236	11.070	12.833	15.086	16.750
6	0.676	0.872	1.237	1.635	2.204	10.645	12.592	14.449	16.812	18.548
7	0.989	1.239	1.690	2.167	2.833	12.017	14.067	16.013	18.475	20.278
8	1.344	1.646	2.180	2.733	3.490	13.362	15.507	17.535	20.090	21.955
9	1.735	2.088	2.700	3.325	4.168	14.684	16.919	19.023	21.666	23.589
10	2.156	2.558	3.247	3.940	4.865	15.987	18.307	20.483	23.209	25.188
11	2.603	3.053	3.816	4.575	5.578	17.275	19.675	21.920	24.725	26.757
12	3.074	3.571	4.404	5.226	6.304	18.549	21.026	23.337	26.217	28.300
13	3.565	4.107	5.009	5.892	7.042	19.812	22.362	24.736	27.688	29.819
14	4.075	4.660	5.629	6.571	7.790	21.064	23.685	26.119	29.141	31.319
15	4.601	5.229	6.262	7.261	8.547	22.307	24.996	27.488	30.578	32.801
16	5.142	5.812	6.908	7.962	9.312	23.542	26.296	28.845	32.000	34.267
17	5.697	6.408	7.564	8.672	10.085	24.769	27.587	30.191	33.409	35.718
18	6.265	7.015	8.231	9.390	10.865	25.989	28.869	31.526	34.805	37.156
19	6.844	7.633	8.907	10.117	11.651	27.204	30.144	32.852	36.191	38.582
20	7.434	8.260	9.591	10.851	12.443	28.412	31.410	34.170	37.566	39.997
21	8.034	8.897	10.283	11.591	13.240	29.615	32.671	35.479	38.932	41.401
22	8.643	9.542	10.982	12.338	14.041	30.813	33.924	36.781	40.289	42.796
23	9.260	10.196	11.689	13.091	14.848	32.007	35.172	38.076	41.638	44.181
24	9.886	10.856	12.401	13.848	15.659	33.196	36.415	39.364	42.980	45.559
25	10.520	11.524	13.120	14.611	16.473	34.382	37.652	40.646	44.314	46.928
26	11.160	12.198	13.844	15.379	17.292	35.563	38.885	41.923	45.642	48.290
27	11.808	12.879	14.573	16.151	18.114	36.741	40.113	43.195	46.963	49.645
28	12.461	13.565	15.308	16.928	18.939	37.916	41.337	44.461	48.278	50.993
29	13.121	14.256	16.047	17.708	19.768	39.087	42.557	45.722	49.588	52.336
30	13.787	14.953	16.791	18.493	20.599	40.256	43.773	46.979	50.892	53.672
40	20.707	22.164	24.433	26.509	29.051	51.805	55.758	59.342	63.691	66.766
50	27.991	29.707	32.357	34.764	37.689	63.167	67.505	71.420	76.154	79.490
60	35.534	37.485	40.482	43.188	46.459	74.397	79.082	83.298	88.379	91.952
70	43.275	45.442	48.758	51.739	55.329	85.527	90.531	95.023	100.425	104.215
80	51.172	53.540	57.153	60.391	64.278	96.578	101.879	106.629	112.329	116.321
90	59.196	61.754	65.647	69.126	73.291	107.565	113.145	118.136	124.116	128.299
100	67.328	70.065	74.222	77.929	82.358	118.498	124.342	129.561	135.807	140.169

BTEC2213 INSTRUMENTATION AND MEASUREMENT**Appendix II: Standard Normal Distribution Table****STANDARD NORMAL DISTRIBUTION: Table Values Represent AREA to the LEFT of the Z score.**

Z	.00	.01	.02	.03	.04	.05	.06	.07	.08	.09
-3.9	.00005	.00005	.00004	.00004	.00004	.00004	.00004	.00004	.00003	.00003
-3.8	.00007	.00007	.00007	.00006	.00006	.00006	.00006	.00005	.00005	.00005
-3.7	.00011	.00010	.00010	.00010	.00009	.00009	.00008	.00008	.00008	.00008
-3.6	.00016	.00015	.00015	.00014	.00014	.00013	.00013	.00012	.00012	.00011
-3.5	.00023	.00022	.00022	.00021	.00020	.00019	.00019	.00018	.00017	.00017
-3.4	.00034	.00032	.00031	.00030	.00029	.00028	.00027	.00026	.00025	.00024
-3.3	.00048	.00047	.00045	.00043	.00042	.00040	.00039	.00038	.00036	.00035
-3.2	.00069	.00066	.00064	.00062	.00060	.00058	.00056	.00054	.00052	.00050
-3.1	.00097	.00094	.00090	.00087	.00084	.00082	.00079	.00076	.00074	.00071
-3.0	.00135	.00131	.00126	.00122	.00118	.00114	.00111	.00107	.00104	.00100
-2.9	.00187	.00181	.00175	.00169	.00164	.00159	.00154	.00149	.00144	.00139
-2.8	.00256	.00248	.00240	.00233	.00226	.00219	.00212	.00205	.00199	.00193
-2.7	.00347	.00336	.00326	.00317	.00307	.00298	.00289	.00280	.00272	.00264
-2.6	.00466	.00453	.00440	.00427	.00415	.00402	.00391	.00379	.00368	.00357
-2.5	.00621	.00604	.00587	.00570	.00554	.00539	.00523	.00508	.00494	.00480
-2.4	.00820	.00798	.00776	.00755	.00734	.00714	.00695	.00676	.00657	.00639
-2.3	.01072	.01044	.01017	.00990	.00964	.00939	.00914	.00889	.00866	.00842
-2.2	.01390	.01355	.01321	.01287	.01255	.01222	.01191	.01160	.01130	.01101
-2.1	.01786	.01743	.01700	.01659	.01618	.01578	.01539	.01500	.01463	.01426
-2.0	.02275	.02222	.02169	.02118	.02068	.02018	.01970	.01923	.01876	.01831
-1.9	.02872	.02807	.02743	.02680	.02619	.02559	.02500	.02442	.02385	.02330
-1.8	.03593	.03515	.03438	.03362	.03288	.03216	.03144	.03074	.03005	.02938
-1.7	.04457	.04363	.04272	.04182	.04093	.04006	.03920	.03836	.03754	.03673
-1.6	.05480	.05370	.05262	.05155	.05050	.04947	.04846	.04746	.04648	.04551
-1.5	.06681	.06552	.06426	.06301	.06178	.06057	.05938	.05821	.05705	.05592
-1.4	.08076	.07927	.07780	.07636	.07493	.07353	.07215	.07078	.06944	.06811
-1.3	.09680	.09510	.09342	.09176	.09012	.08851	.08691	.08534	.08379	.08226
-1.2	.11507	.11314	.11123	.10935	.10749	.10565	.10383	.10204	.10027	.09853
-1.1	.13567	.13350	.13136	.12924	.12714	.12507	.12302	.12100	.11900	.11702
-1.0	.15866	.15625	.15386	.15151	.14917	.14686	.14457	.14231	.14007	.13786
-0.9	.18406	.18141	.17879	.17619	.17361	.17106	.16853	.16602	.16354	.16109
-0.8	.21186	.20897	.20611	.20327	.20045	.19766	.19489	.19215	.18943	.18673
-0.7	.24196	.23885	.23576	.23270	.22965	.22663	.22363	.22065	.21770	.21476
-0.6	.27425	.27093	.26763	.26435	.26109	.25785	.25463	.25143	.24825	.24510
-0.5	.30854	.30503	.30153	.29806	.29460	.29116	.28774	.28434	.28096	.27760
-0.4	.34458	.34090	.33724	.33360	.32997	.32636	.32276	.31918	.31561	.31207
-0.3	.38209	.37828	.37448	.37070	.36693	.36317	.35942	.35569	.35197	.34827
-0.2	.42074	.41683	.41294	.40905	.40517	.40129	.39743	.39358	.38974	.38591
-0.1	.46017	.45620	.45224	.44828	.44433	.44038	.43644	.43251	.42858	.42465
-0.0	.50000	.49601	.49202	.48803	.48405	.48006	.47608	.47210	.46812	.46414

BTEC2213 INSTRUMENTATION AND MEASUREMENT

APPENDIX III: Thermocouple Table

Type E: chromel–constantan

Type J: iron–constantan

Type K: chromel–alumel

Type N: nicrosil–nasil

Type S: platinum/10% rhodium–platinum

Type T: copper–constantan

<i>Temp. (°C)</i>	<i>Type E</i>	<i>Type J</i>	<i>Type K</i>	<i>Type N</i>	<i>Type S</i>	<i>Type T</i>
-270	-9.834		-6.458	-4.345		
-260	-9.795		-6.441	-4.336		
-250	-9.719		-6.404	-4.313		
-240	-9.604		-6.344	-4.277		-6.105
-230	-9.456		-6.262	-4.227		-6.003
-220	-9.274		-6.158	-4.162		-5.891
-210	-9.063	-8.096	-6.035	-4.083		-5.753
-200	-8.824	-7.890	-5.891	-3.990		-5.603
-190	-8.561	-7.659	-5.730	-3.884		-5.438
-180	-8.273	-7.402	-5.550	-3.766		-5.261
-170	-7.963	-7.122	-5.354	-3.634		-5.070
-160	-7.631	-6.821	-5.141	-3.491		-4.865
-150	-7.279	-6.499	-4.912	-3.336		-4.648
-140	-6.907	-6.159	-4.669	-3.170		-4.419
-130	-6.516	-5.801	-4.410	-2.994		-4.177
-120	-6.107	-5.426	-4.138	-2.807		-3.923
-110	-5.680	-5.036	-3.852	-2.612		-3.656
-100	-5.237	-4.632	-3.553	-2.407		-3.378
-90	-4.777	-4.215	-3.242	-2.193		-3.089
-80	-4.301	-3.785	-2.920	-1.972		-2.788
-70	-3.811	-3.344	-2.586	-1.744		-2.475
-60	-3.306	-2.892	-2.243	-1.509		-2.152
-50	-2.787	-2.431	-1.889	-1.268	-0.236	-1.819
-40	-2.254	-1.960	-1.527	-1.023	-0.194	-1.475
-30	-1.709	-1.481	-1.156	-0.772	-0.150	-1.121
-20	-1.151	-0.995	-0.777	-0.518	-0.103	-0.757
-10	-0.581	-0.501	-0.392	-0.260	-0.053	-0.383

BTEC2213 INSTRUMENTATION AND MEASUREMENT

<i>Temp. (°C)</i>	<i>Type E</i>	<i>Type J</i>	<i>Type K</i>	<i>Type N</i>	<i>Type S</i>	<i>Type T</i>
0	0.000	0.000	0.000	0.000	0.000	0.000
10	0.591	0.507	0.397	0.261	0.055	0.391
20	1.192	1.019	0.798	0.525	0.113	0.789
30	1.801	1.536	1.203	0.793	0.173	1.196
40	2.419	2.058	1.611	1.064	0.235	1.611
50	3.047	2.585	2.022	1.339	0.299	2.035
60	3.683	3.115	2.436	1.619	0.365	2.467
70	4.329	3.649	2.850	1.902	0.432	2.908
80	4.983	4.186	3.266	2.188	0.502	3.357
90	5.646	4.725	3.681	2.479	0.573	3.813
100	6.317	5.268	4.095	2.774	0.645	4.277
110	6.996	5.812	4.508	3.072	0.719	4.749
120	7.683	6.359	4.919	3.374	0.795	5.227
130	8.377	6.907	5.327	3.679	0.872	5.712
140	9.078	7.457	5.733	3.988	0.950	6.204
150	9.787	8.008	6.137	4.301	1.029	6.702
160	10.501	8.560	6.539	4.617	1.109	7.207
170	11.222	9.113	6.939	4.936	1.190	7.718
180	11.949	9.667	7.338	5.258	1.273	8.235
190	12.681	10.222	7.737	5.584	1.356	8.757
200	13.419	10.777	8.137	5.912	1.440	9.286
210	14.161	11.332	8.537	6.243	1.525	9.820
220	14.909	11.887	8.938	6.577	1.611	10.360
230	15.661	12.442	9.341	6.914	1.698	10.905
240	16.417	12.998	9.745	7.254	1.785	11.456
250	17.178	13.553	10.151	7.596	1.873	12.011
260	17.942	14.108	10.560	7.940	1.962	12.572
270	18.710	14.663	10.969	8.287	2.051	13.137
280	19.481	15.217	11.381	8.636	2.141	13.707
290	20.256	15.771	11.793	8.987	2.232	14.281
300	21.033	16.325	12.207	9.340	2.323	14.860
310	21.814	16.879	12.623	9.695	2.414	15.443
320	22.597	17.432	13.039	10.053	2.506	16.030
330	23.383	17.984	13.456	10.412	2.599	16.621
340	24.171	18.537	13.874	10.772	2.692	17.217
350	24.961	19.089	14.292	11.135	2.786	17.816
360	25.754	19.640	14.712	11.499	2.880	18.420
370	26.549	20.192	15.132	11.865	2.974	19.027
380	27.345	20.743	15.552	12.233	3.069	19.638
390	28.143	21.295	15.974	12.602	3.164	20.252
400	28.943	21.846	16.395	12.972	3.260	20.869
410	29.744	22.397	16.818	13.344	3.356	
420	30.546	22.949	17.241	13.717	3.452	
430	31.350	23.501	17.664	14.091	3.549	
440	32.155	24.054	18.088	14.467	3.645	
450	32.960	24.607	18.513	14.844	3.743	
460	33.767	25.161	18.938	15.222	3.840	
470	34.574	25.716	19.363	15.601	3.938	

BTEC2213 INSTRUMENTATION AND MEASUREMENT

<i>Temp. (°C)</i>	<i>Type E</i>	<i>Type J</i>	<i>Type K</i>	<i>Type N</i>	<i>Type S</i>	<i>Type T</i>
480	35.382	26.272	19.788	15.981	4.036	
490	36.190	26.829	20.214	16.362	4.135	
500	36.999	27.388	20.640	16.744	4.234	
510	37.808	27.949	21.066	17.127	4.333	
520	38.617	28.511	21.493	17.511	4.432	
530	39.426	29.075	21.919	17.896	4.532	
540	40.236	29.642	22.346	18.282	4.632	
550	41.045	30.210	22.772	18.668	4.732	
560	41.853	30.782	23.198	19.055	4.832	
570	42.662	31.356	23.624	19.443	4.933	
580	43.470	31.933	24.050	19.831	5.034	
590	44.278	32.513	24.476	20.220	5.136	
600	45.085	33.096	24.902	20.609	5.237	
610	45.891	33.683	25.327	20.999	5.339	
620	46.697	34.273	25.751	21.390	5.442	
630	47.502	34.867	26.176	21.781	5.544	
640	48.306	35.464	26.599	22.172	5.648	
650	49.109	36.066	27.022	22.564	5.751	
660	49.911	36.671	27.445	22.956	5.855	
670	50.713	37.280	27.867	23.348	5.960	
680	51.513	37.893	28.288	23.740	6.064	
690	52.312	38.510	28.709	24.133	6.169	
700	53.110	39.130	29.128	24.526	6.274	
710	53.907	39.754	29.547	24.919	6.380	
720	54.703	40.382	29.965	25.312	6.486	
730	55.498	41.013	30.383	25.705	6.592	
740	56.291	41.647	30.799	26.098	6.699	
750	57.083	42.283	31.214	26.491	6.805	
760	57.873	42.922	31.629	26.885	6.913	
770	58.663	43.563	32.042	27.278	7.020	
780	59.451	44.207	32.455	27.671	7.128	
790	60.237	44.852	32.866	28.063	7.236	
800	61.022	45.498	33.277	28.456	7.345	
810	61.806	46.144	33.686	28.849	7.454	
820	62.588	46.790	34.095	29.241	7.563	
830	63.368	47.434	34.502	29.633	7.672	
840	64.147	48.076	34.908	30.025	7.782	
850	64.924	48.717	35.314	30.417	7.892	
860	65.700	49.354	35.718	30.808	8.003	
870	66.473	49.989	36.121	31.199	8.114	
880	67.245	50.621	36.524	31.590	8.225	
890	68.015	51.249	36.925	31.980	8.336	
900	68.783	51.875	37.325	32.370	8.448	
910	69.549	52.496	37.724	32.760	8.560	
920	70.313	53.115	38.122	33.149	8.673	
930	71.075	53.729	38.519	33.538	8.786	
940	71.835	54.341	38.915	33.926	8.899	
950	72.593	54.949	39.310	34.315	9.012	